


MVE Doble Series

- Liquid and vapour storage options
- Low liquid nitrogen consumption
- Convenient lightweight package

Tank Features

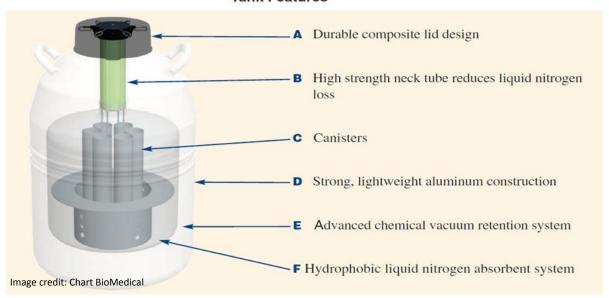

- Reduced investment as MVE Doble Series tanks are the first units designed for both vapour shipment and liquid storage.
- The hybrid tanks have a unique absorbent layer in the base of the storage tank, which
 enables them to be charged with nitrogen and employed as dry / vapour shippers resulting in
 hold times of up to thirty days.
- Their **rugged construction** means the MVE Doble series tanks are durable for shipment and storage no short term investment, these tanks are designed to last on the plane, truck or farm.
- Once at the final destination, the tanks can be filled with liquid as normal and become a high quality liquid storage tank for **long term storage**.
- 40 years of technology has led to the current range being the best-selling units for breeders'
 use, on the world market.
- Tanks in this range have a very **high capacity**, of up to 3,500 straws in a single vapour shipment.

- THREE Year Vacuum Warranty
- Conforms with MDD 93/42/EEC, Medical Device Directive for the EU
- The MVE Doble series are simple to decontaminate. MVE's exclusive hydrophobic absorption
 material not only guarantees optimum performance at all times (with no down time to dry out
 the tank) but enables water soluble solvents and disinfectants to be used for decontamination.



MVE Doble Series Statistics

	Doble 11	Doble 20	Doble 28	Doble 34	Doble 47	Doble 47- 10
No. of canisters	6	6	6	6	6	10
No. of 1/2cc straws packed 10 per						_
cane	660	660	2400	2100	4500	3500
Liquid N capacity L	10.0	18.5	28.0	32.0	46.0	46.0
Static Evaporation Rate L/day	0.17	0.10	0.35	0.20	0.40	0.40
Normal Working Duration days for						
liquid	37	116	50	100	74	72

Reference: http://www.chartbiomed.com

Head Office: Plot 5085 Luanshya Road • PostNet #271, P.Bag E891, Lusaka, Zambia
Tel: + (260) 211 233484/5 223646 • Fax + (260) 211 233490 • E-mail: sales@ap-inter.com
Livingstone Branch: Linda Road, Livingstone, Tel/Fax: + (260) 213 322831 • E-mail: apiliv@iconnect.zm

Kitwe Branch: Tel: + (260) 966 732121 • E-mail: graham@ap-inter.com

